


AL 2075

POWER LED UNDERWATER STAINLESS STEEL POOL LIGHTING



BODY MATERIAL	: AISI 316L STAINLESS STEEL	FRAME DIMENSION	: 250 mm.
LED	: 32X4 W. & 16X4 W. (WHITE, WARM WHITE, BLUE) 24X1 W. & 24X3 W. (WHITE, WARM WHITE, BLUE, RED, GREEN, AMBER) 24X3 W. (RGB)	TOTAL LENGHT	: 141,5 mm.
VOLTAGE	: DC12V. DIMMABLE DALI	BODY LENGHT	: 99 mm.
WATTAGE	: 24W. , 64W. , 72W. , 128W.	BODY DIMENSION	: 219 mm.
CABLE GLAND	: PG9 CHROME	CASE MATERIALS	: AISI 316L STAINLESS STEEL
GASKETS	: SILICON GASKETS	BODY THICKNESS	: 4 mm.
GLASS	: 5 mm. TEMPERED ICED GLASS	FRAME THICKNESS	: 6 mm
CABLE	: 2 mt. 2 X 1,5 mm² RNF NEOPREN	CASE THICKNESS	: 2,6 mm
LEN`S DEGREE	CABLE : 120°	GARANTEE	: 2 YEARS
		NET WEIGH	: 5,7 kgs.
		PROTECTION CLASS	: IP68 (1mt.) CLASS III
		CRI	: LM80

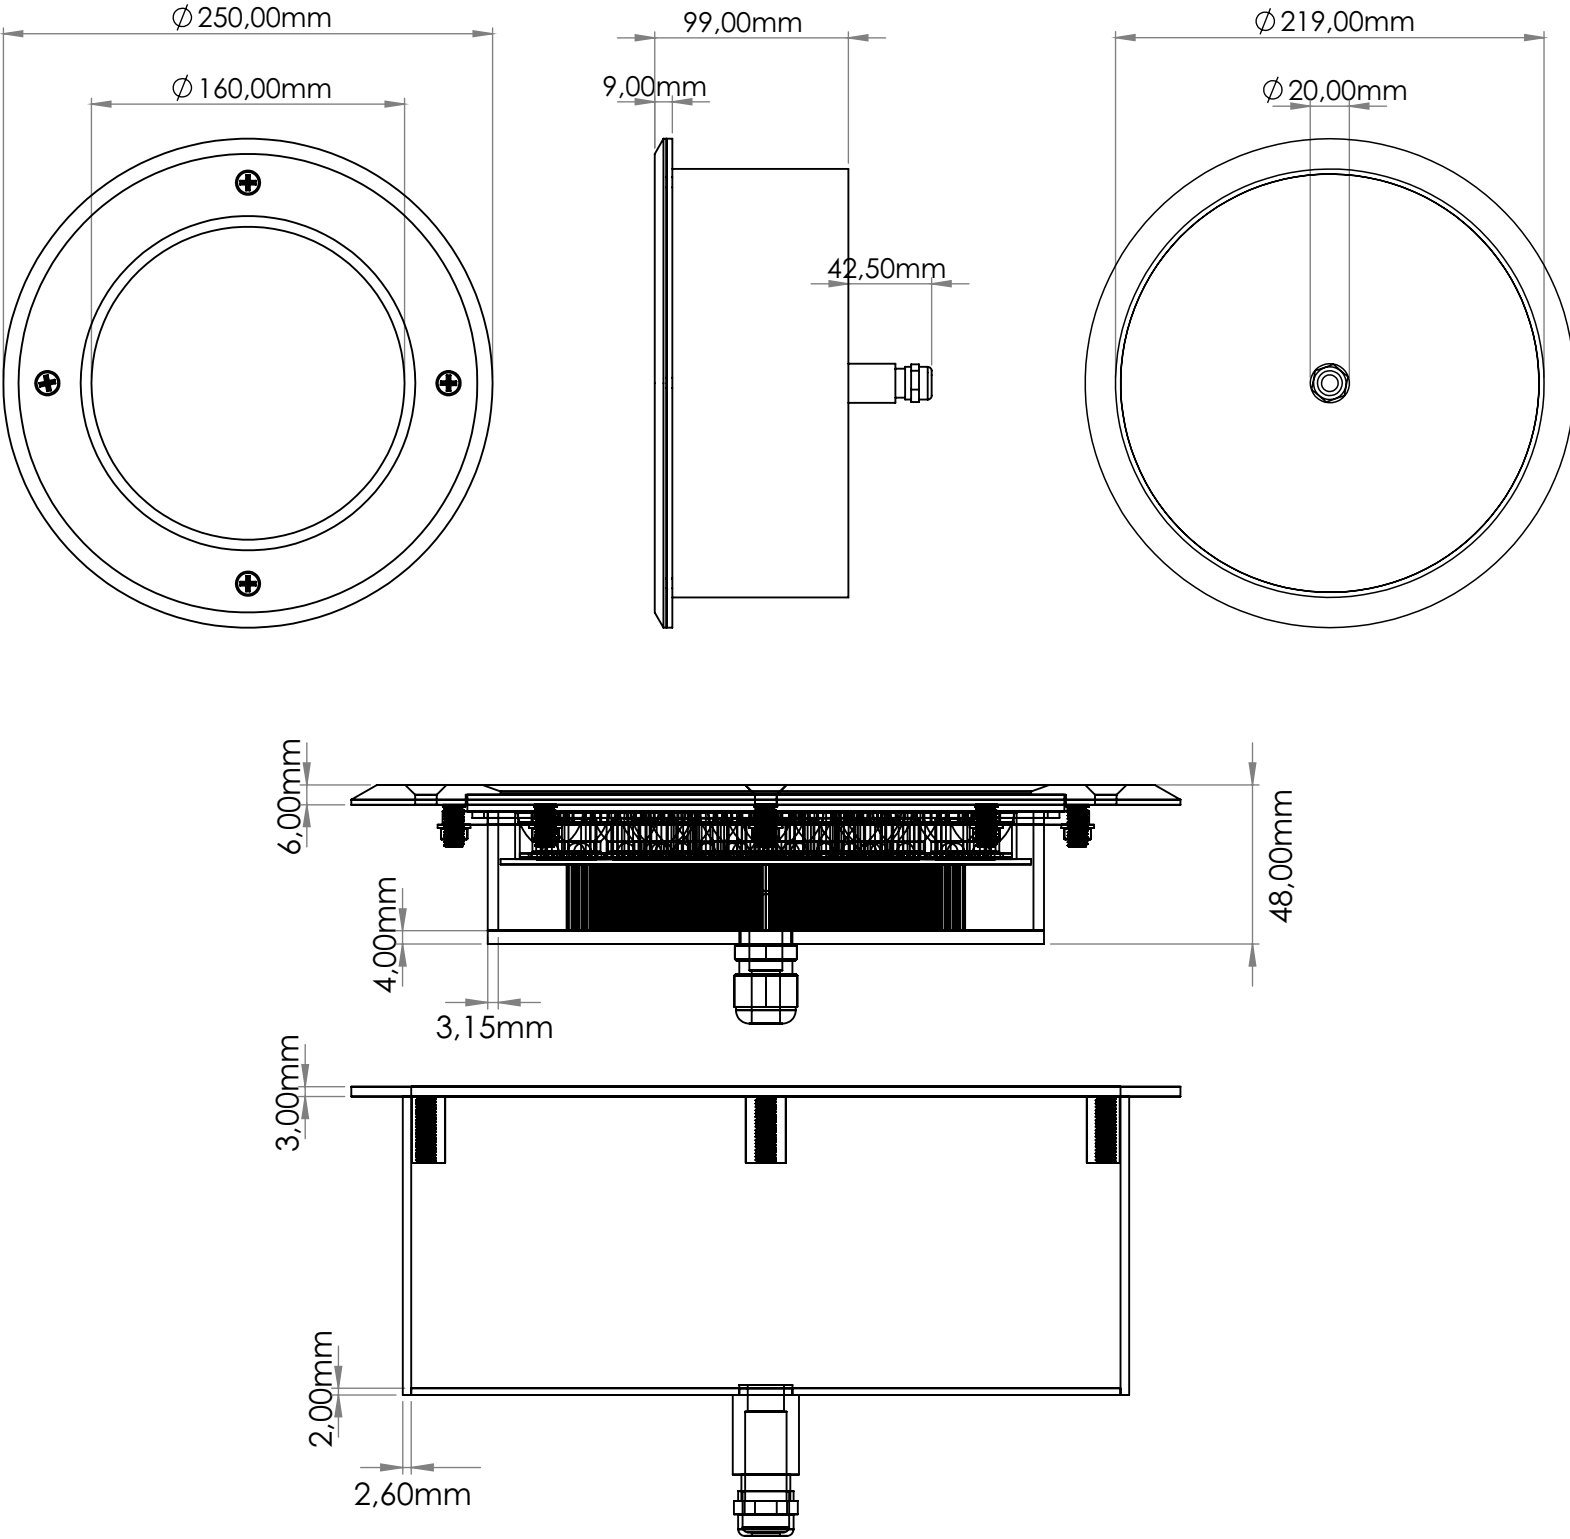

LED COLOUR	LUMEN	WAVELENGTH	WATT	VOLT
32x4 White	18000	6000-6500K	128W	24V
32x4 Warm White	18000	3000-3300K	128W	24V
32x4 Blue		470nm	128W	24V
16x4 White	9000	6000-6500K	64W	24V
16x4 Warm White	9000	3000-3300K	64W	24V
16x4 Blue		470nm	64W	24V
24x1 White	2400	6000-6500K	24W	12V
24x1 Warm White	2400	3000-3300K	24W	12V
24x1 Blue		470nm	24W	12V
24x1 Green		530nm	24W	12V
24x1 Red		630nm	24W	12V
24x1 Amber		509nm	24W	12V
24x3 White	5300	6000-6500K	72W	12V
24x3 Warm White	5300	3000-3300K	72W	12V
24x3 Blue		470nm	72W	12V
24x3 Green		530nm	72W	12V
24x3 Red		630nm	72W	12V
24x3 Amber		509nm	72W	12V
24x3 RGB			72W	12V

Specifications
Body and case in AISI 316L stainless steel
5 mm Tempered iced glass
Stainless steel P9G cable connector
No corrosion due to water
RNF cable 2 m
Use until 5 m
White, Warm White, Blue, Green, Red, Amber colours
RGB Full colour
2 years quaranty